

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
11 November 2004 (11.11.2004)

PCT

(10) International Publication Number
WO 2004/097155 A2

(51) International Patent Classification⁷: **E21B**
(21) International Application Number:
PCT/NO2003/000418
(22) International Filing Date:
15 December 2003 (15.12.2003)
(25) Filing Language: Norwegian
(26) Publication Language: English
(30) Priority Data:
2002 6025 16 December 2002 (16.12.2002) NO
(71) Applicant and
(72) Inventor: KRISTIANSEN, Einar [NO/NO]; Sandalsloen
55, N-4022 Stavanger (NO).
(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,

CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE,
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR,
KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK,
MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT,
RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (BW, GH,
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE,
SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA,
GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— of inventorship (Rule 4.17(iv)) for US only

Published:

— without international search report and to be republished
upon receipt of that report

[Continued on next page]

(54) Title: CASING WITH ISOLATED ANNULAR SPACE

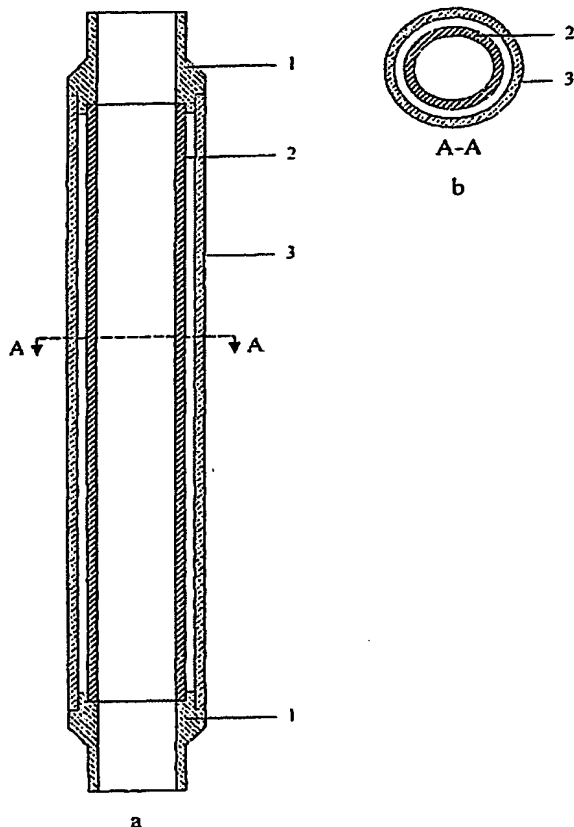

(57) Abstract: The invention is comprised of (see fig. 1) an inner pipe (2), and an outer pipe (3), and two end subs (1). An isolated circular hollowed space is contained in between these components. The isolated space can be used for transport of different medias down into the well, this can be vacuum, air, gas, acids, solids, tracers, or other well stimulating medias. The end subs (1) can be connected to the casing in the well and become an integrated part of the casing. The invention can be cemented on the outside like the casing can. The invention can be perforated after installed in the well.

WO 2004/097155 A2